



### TWP PRESERVATIVE APPLICATION

- Mix preservative thoroughly
- Apply TWP® by brush, pump sprayer or roller
- Saturate surface with TWP®
- If needed, apply second coat wet on wet
- Do not let TWP® puddle
- Excessive product that does not penetrate may cause failure
- Overnight dry time depending on temperature and humidity
- Do not thin TWP®
- Cleanup with Mineral Spirits
- Do not apply below 50° F or above 90° F
- Coverage Rate: 200-400 sq. ft. per gallon

TWP® 1500 series is designed to penetrate the wood surface and not build a film. Apply as much material as the wood can absorb. Over application may leave an oily residue on the surface and may cause an early failure of the stain. Any material that has not penetrated 3 hours after application must be removed.



### TWP® 1500 Series is EASY to APPLY!

#### SURFACE PREPARATION

**New Wood:** It is necessary to allow new wood to age for up to six months before staining. Pressure treated wood should be allowed 12 months natural weathering before staining.

**Old Wood:** Untreated Old Wood can be revived to look like new. Remove mildew and growth with a mild bleach and water solution followed by a 1500-2500 p.s.i. output power washer. Previously stained wood may require a chemical stripping or brightening agent combined with power washing to remove all of the old coating. When working with a power washer use caution to avoid excess fraying of the wood surface. Allow 36 to 48 hours of dry time before TWP® application.



LOW VOC FORMULA

### TWP® 1500 SERIES

#### WATER REPELLENT

Resists warping, cracking and splitting. Prevents freeze damage in colder climates.

#### STOPS U.V. DAMAGE\*

U.V. absorbing pigments prevent unsightly wood graying, darkening and fading.

#### PREVENTS WOOD ROT

Wood preservative prevents structural damage and decay for above ground surfaces. Specially formulated for log homes, decking, fences, roofing and siding.

#### MILDEW RESISTANT

Inhibits growth of mold and mildew on surface preventing premature discoloration. Decks, log homes, fences and wood siding stay new looking longer.

#### EASY TO APPLY AND MAINTAIN

Penetrating, long lasting formula is easy to apply and easy to maintain.

\* TWP® 1500 Clear contains no UV absorbing pigments and will allow the wood to gray.

Your Local TWP Dealer



TWP® is a registered trademark of AMTECO Inc.  
PO Box 9 • 1100 Jefferson Dr.  
Pacific, Missouri 63069



Why Just Stain...  
...WHEN YOU CAN PRESERVE!

- ✓ EASY TO APPLY
- ✓ REPELS WATER LONGER
- ✓ PREVENTS MOLD, MILDEW AND WOOD ROT



LOW VOC FORMULA



for more information: 1-800-969-4811  
or visit: [www.amteco.com](http://www.amteco.com)



TWP® is a registered trademark of AMTECO Inc.





# SUPERIOR PROTECTION FOR ALL EXTERIOR WOOD SURFACES

**LOW VOC FORMULA**


## TWP® 1500 SERIES PRESERVES NATURAL WOOD COLOR!

TWP® 1500 Series is an EPA registered wood preservative which prevents structural damage and wood decay on exterior above ground wood surfaces such as untreated or previously treated fencing, decking, wood siding, log homes and roofing. TWP® 1500 Series resists water absorption that causes warping, cracking and splitting as well as preventing freeze damage in colder climates.


TWP® 1500 Series is a low VOC preservative with special U.V. absorbing pigments that prevent unsightly wood graying, darkening and fading. The selected mildewcides inhibit the growth of mold and mildew which assist in preventing premature discoloration.

TWP® 1500 Series will keep your wood beautiful, fresh and looking new longer. The ease of application and maintenance will allow you to enjoy your investment for years to come.

**TWP® 1500 Series is available in nine popular colors!**

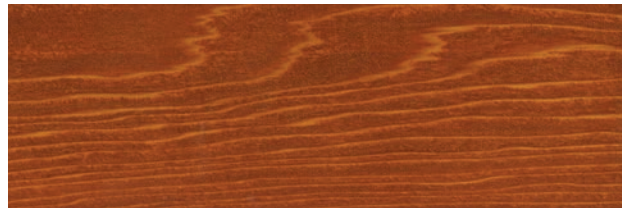

TWP® 1502 Redwood

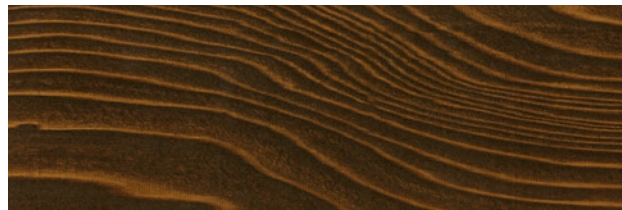


TWP® 1504 Black Walnut




TWP® 1515 Honeytone



TWP® 1520 Pecan

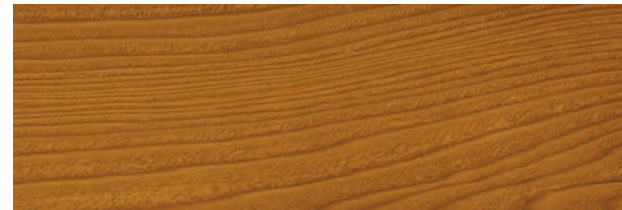

TWP® 1501 Cedartone\*

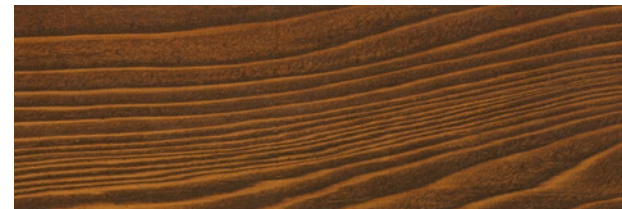

TWP® 1503 Dark Oak



TWP® 1511 California Redwood



TWP® 1516 Rustic



TWP® 1530 Natural\*

**TWP® 1500 Series Total Wood Preservative:**

- ✓ **BEAUTIFIES & PRESERVES**
- ✓ **REPELS WATER**
- ✓ **PREVENTS WOOD ROT**
- ✓ **STOPS U.V. DAMAGE**
- ✓ **ELIMINATES MOLD & MILDEW**
- ✓ **EASY TO APPLY**

**TWP® 1500 Series Total Wood Preservative is Ideal for These Applications:**

- ✓ **LOG HOMES**
- ✓ **WOOD FENCING**
- ✓ **DECKING**
- ✓ **ROOFING & SIDING**

\* TWP® 1501 Cedartone compares to TWP® 501 Cedartone and TWP® 1530 Natural compares to TWP® 101 Natural Cedartone



**for more information: 1-800-969-4811 or visit: [www.amteco.com](http://www.amteco.com)**